


# XQY-HYD-18/40-180KE

## Hybird Coupler

### Specifications

SN	Parameters	Specifications
1	频率范围 Frequency Range	18000~40000 MHz
2	插入损耗 Insertion Loss	≤ 3.2 dB
3	主路驻波 Primary VSWR	Max.1.80
4	支路驻波 Secondary VSWR	Max.1.80
5	方向性 Directivity	Min.12dB
6	幅度平衡 Amplitude Balance	Max. ±1.2dB
7	相位平衡 Phase Balance	±13°
8	阻抗 Impedance	50 Ohms
9	端口接头 Input/Output Connectors	2.92-Female
10	承受功率 Power Rating	30W
11	工作温度 Operation Temperature	-45°C ~ +85°C
12	表面处理 Surface Finishing	Black paint

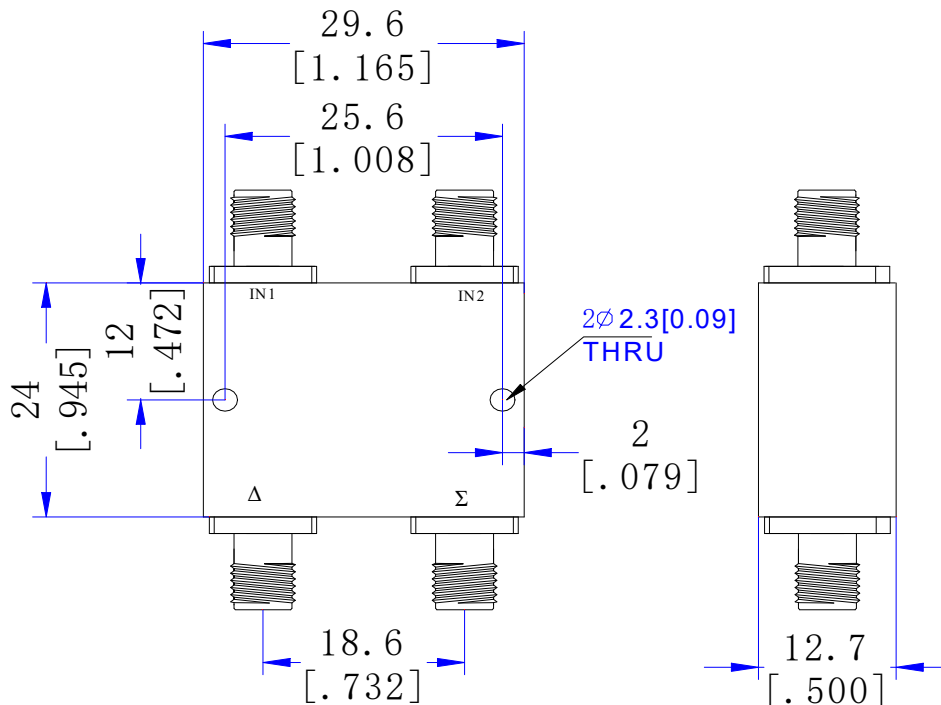

注: 尺寸(mm/[英寸])，一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)